

Northern Midlands Irrigation Scheme (NMIS)

The NMIS has a total forecast cost of \$217.9 million and will supply highly reliable irrigation water every year to approximately 50 irrigators.

The NMIS will enhance irrigation opportunities in the lower Isis Valley and Macquarie River region. The scheme is underpinned by large Hydro Tasmania storages in the central highlands of Tasmania.

The NMIS delivered its first water on 1 October 2026, for the inaugural 2026/27 summer irrigation season.

The principal primary production focus in the region is grazing (dairy, beef and sheep) and field crops (cereals, poppies, seed crops, lucerne, potatoes and peas).

Water Supply and Distribution

The scheme has a capacity of 25,500 ML and will deliver water over a 180-day irrigation season opening in early October and closing in late March. The scheme flow rate is based on 150 days giving irrigators some flexibility with their take.

Infrastructure and Operations

The NMIS is the largest irrigation scheme in the state in terms of its capital value and summer water capacity, including a pipeline of 152.4 km, one pump station, two boost pump stations, two balance tanks and one buffer dam.

Economic Impact

The NMIS has created approximately 150 jobs during the construction phase and about 450 jobs post-completion in the region.

The scheme will deliver \$184 million in increased farming revenue and an ongoing \$54 million annual boost to the Tasmanian economy.




The Northern Midlands Irrigation Scheme is jointly funded by the Australian Government (\$108.98 million), through the National Water Grid Fund, Tasmanian Government (\$72.26 million), and Tasmanian irrigators through the purchase of water entitlements on the Scheme (\$36.72 million).



Northern Midlands Irrigation Scheme (NMIS)

Scheme map

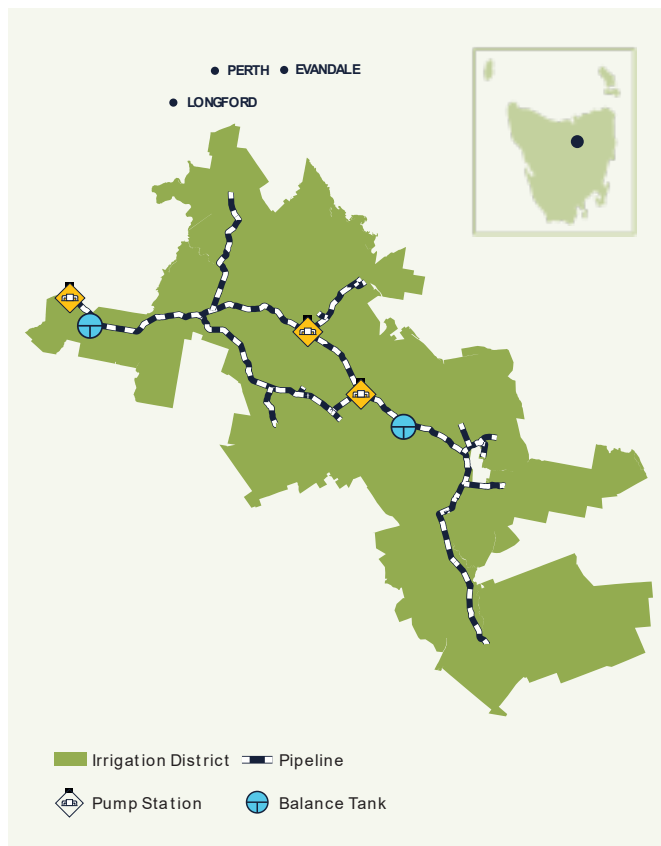

Fast facts

Fast facts	
Capital cost	\$218 M
State Government Contribution	\$72.26 M
Federal Government Contribution	\$108.98 M
Irrigator Contribution	\$36.72 M
Number of irrigators	50
Scheme capacity	25,500 megalitres
Current water entitlement take up	96%
Water entitlement sales price (summer)	\$1440 / ML
Irrigation season duration	180 days (flow rate based on 150 days)
Length of pipeline	152.4 km
Pump stations	3
Balance tanks	2
Buffer dam	1

Key dates

Funding approved	June 23
EPBC approval	July 24
Start of construction	Aug 24
Practical completion	
Poatina buffer dam	Sep 25
Pipelines, Pump Stations, Balance Tanks	Sep 26
Commissioning	Oct 26

Get in Touch:

Phone: (03) 6398-8433

Email: enquiries@tasirrigation.com.au

www.tasmanianirrigation.com.au